




**Quick-Garden**




# **GARAGE 6X6**

## **Assembly instructions**



<u>PRODUCT NAME</u>	<u>GARAGE 6X6 (double door)</u>
<u>REFERENCE NUMBER</u>	

Garage 6 x 6 (43)						
No.	Dimensions (mm)			Quantity	Image	Annotation
	Length	Width	Thick.			
1	5950	130	43	15		Wall B
2	5950	65	43	1		Wall A
3	5950	130	43	7		Wall C D
4	5950	65	43	1		Wall A
5	5950	130	43	1		Wall A
6	400	130	43	30		Wall A
7	350	130	43	15		Wall A
8	250	130	43	46		Support boards for Wall A C D
9	250	130	43	2		Support boards for Wall C D
10	1274	130	43	31		Wall C
11	1151	130	43	8		Wall C
12	3815	130	43	7		Wall C
13	3294	130	43	2		Wall C D
14	3074	130	43	2		Wall C D
15	3294	130	50	1		Rafters
16	3074	130	50	1		Rafters
17	3496	130	50	4		Rafters
18	3276	130	50	4		Rafters
19	3250			42.3 m <sup>2</sup>		Roof boards
20	3350	105	20	4		Wind boards
21	3375	105	20	4		Wind boards
22	3375	60	16	4		Wind boards supporters
23	3185	105	20	4		Roof plank
24	3185	35	25	4		Roof plank borders
25	300	140	20	2		Decorative diamond
26	5790	70	50	2		Bearers
27	5650	70	50	2		Bearers
28	100	70	50	2		Bearers
29	2100	100	60	6		Support boards
30	5950	780	43	2		Roof frame triangle
31	5950	780	43	1		Roof frame triangle
32	1920	850	43	1		Doors
33	1010	1380	43	2		Windows
34	3825	130	43	8		Wall D

Screws			Nails		
	3.5x5	For windows and doors		2.5x6	For boards
	3.5x3	For roof decorative parts			

### **IMPORTANT (Read carefully before starting)!**

- The following instructions include both pictures (indicating every part by the digits – see part list above) and illustrations. Please keep in mind that the illustrations are just a general guide to assembling all our products (For example: The illustration on how to assemble a roof applies to all our roofs). However specific models will vary in the quantity of materials needed. By

**closely consulting the part-list, you will know how many parts you need for each stage of the assembly, while the illustrations will show you how put them together.**

**- If some extra boards are left over after assembling your product, do not worry. We sometimes include extra boards to ensure that the delivery package is perfectly compact and solid.**

### **1. General instructions**

**Read carefully before starting.** First of all, we want to thank you for buying one of our products. Please read these instructions carefully before unpacking the parts.

### **2. Storing your product prior to assembly.**

Your unpacked product must be stored in a dry, ventilated place, where it is protected from the weather (the package is not waterproof) and direct sunlight. The package and parts should be laid flat on the ground in order to avoid any damage to them. We strongly recommend assembling the product as soon as possible after it is delivered, because any complaints regarding missing or damaged parts can only be made up to 10 days after the date of delivery.

### **3. Safety.**

The wooden parts may cause splinters, so please handle them carefully and wear protective gloves. Make sure there are no protruding nails, screws or staples in the assembled pieces. Always follow the instructions carefully and keep to the order of steps.

### **4.Assembly.**


Before starting to assemble your structure, we strongly recommend that you watch our video guide on our website [www.quick-garden.co.uk](http://www.quick-garden.co.uk) (under the category "Assembly"). During the installation process constantly check that everything is level and parallel. For all parts that need to be assembled using screws, it is advisable to pre-drill holes to avoid the risk of splitting the wood during screwing.

**4.1. Familiarize yourself with the parts.** All parts are numbered, so start by checking that all parts are present by matching them off against your instruction manual. We recommend you sort the parts into separate piles. You will need a rubber hammer, electric screw-driver and anchor screws.




**4.2. Foundation.** Before starting the installation, make sure that the building surface is perfectly flat and level. Lay the foundation elements (PVC blocks, concrete slabs, etc.) For floorless models, the foundation should be at least the same size or larger (recommended) than the external dimension of the structure.




**4.3. Bearers.** Place the bearers in the position of the structure plan. Make sure the bearers are at an equal diagonal distance before fixing them to each other. Fix the bearers into place with screws. Screw the bearers into the foundation with anchor screws.

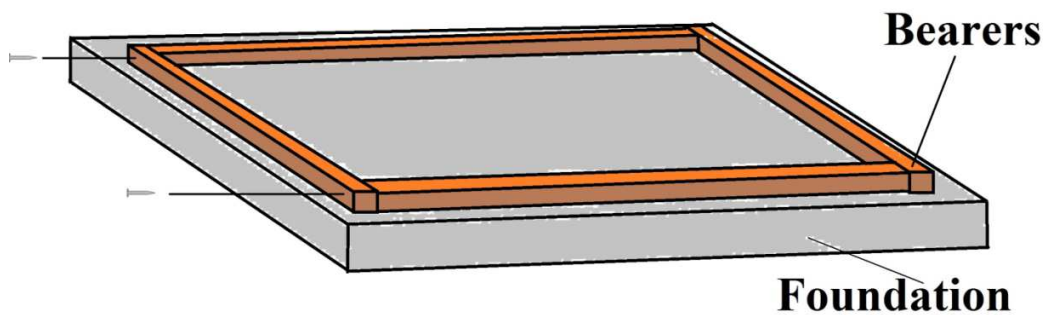



**4.4. Assembling the walls:** place the wall-boards directly on the bearers so that the wall-boards lay alongside them:

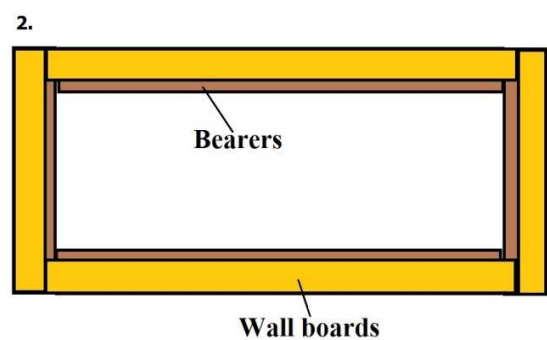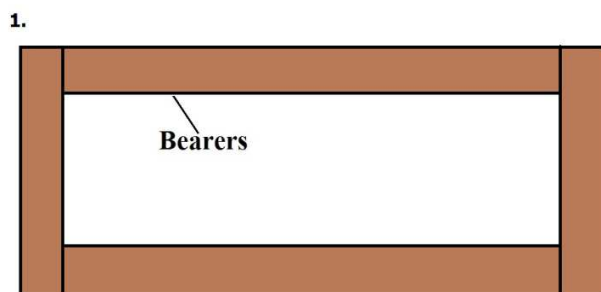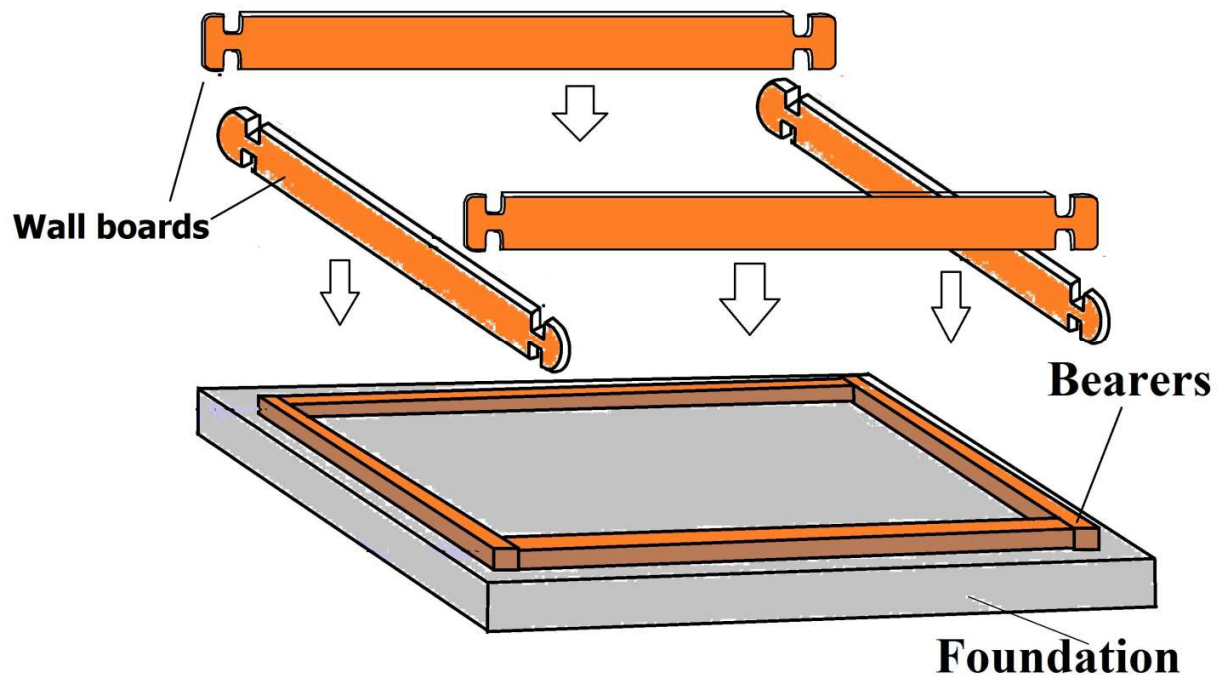


The actual plans:

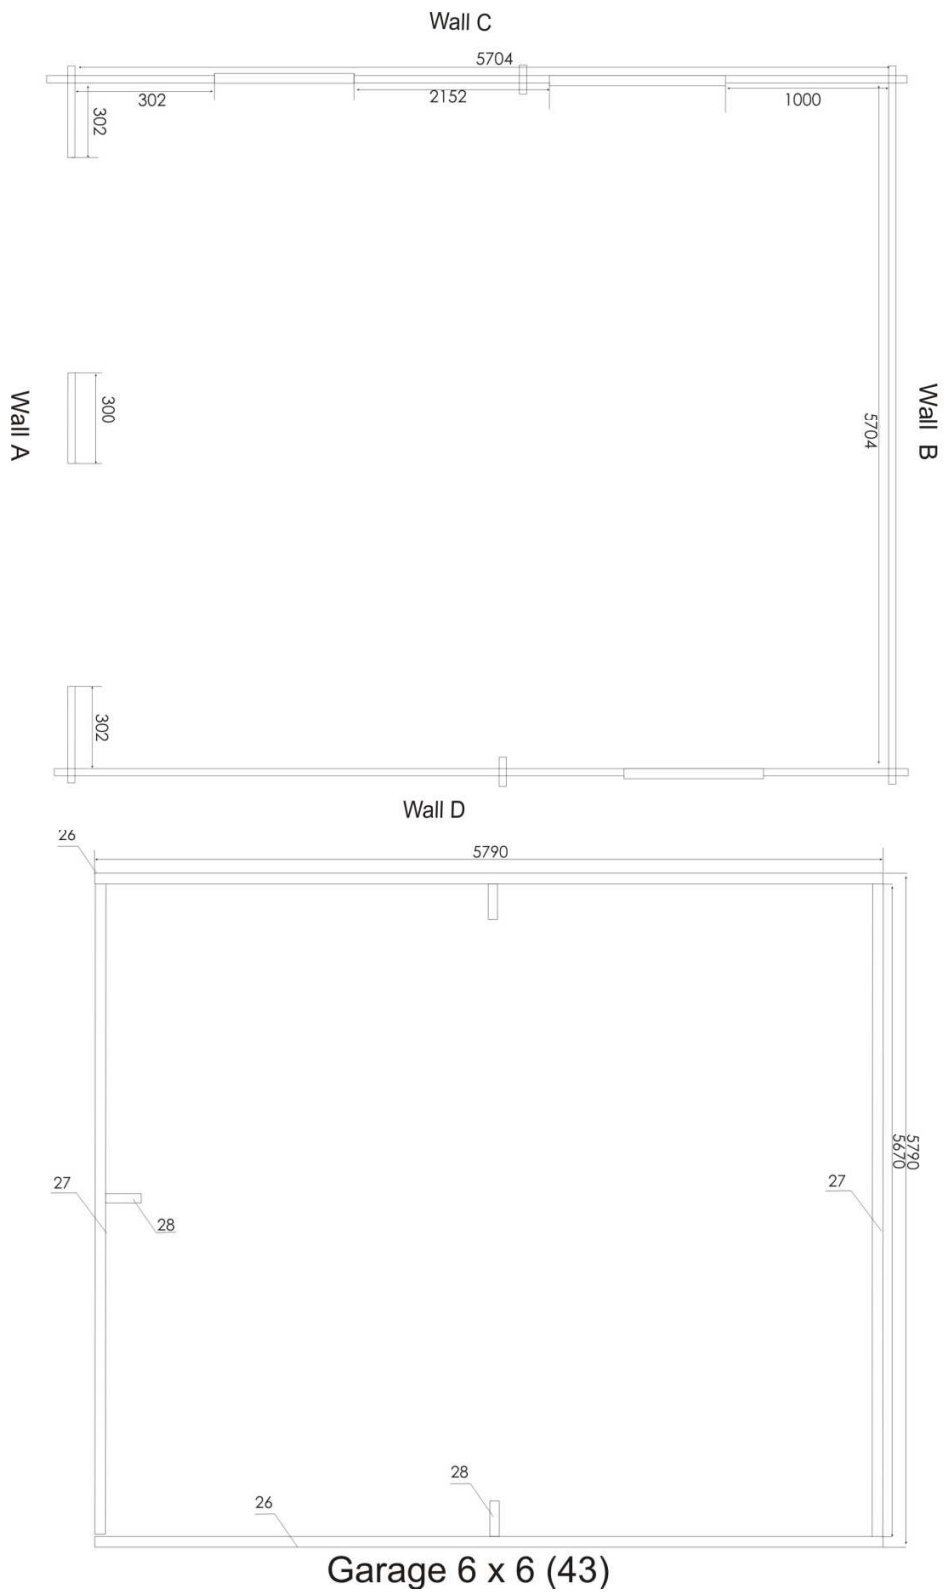


The wall-boards must be placed so that the ends interlock. Now screw the first row of wall-boards into the bearers. All the following rows of placed wall-boards should interlock not only at the ends, but along their length as well. Please screw each new row of wall-boards into the former row to ensure a solid structure.

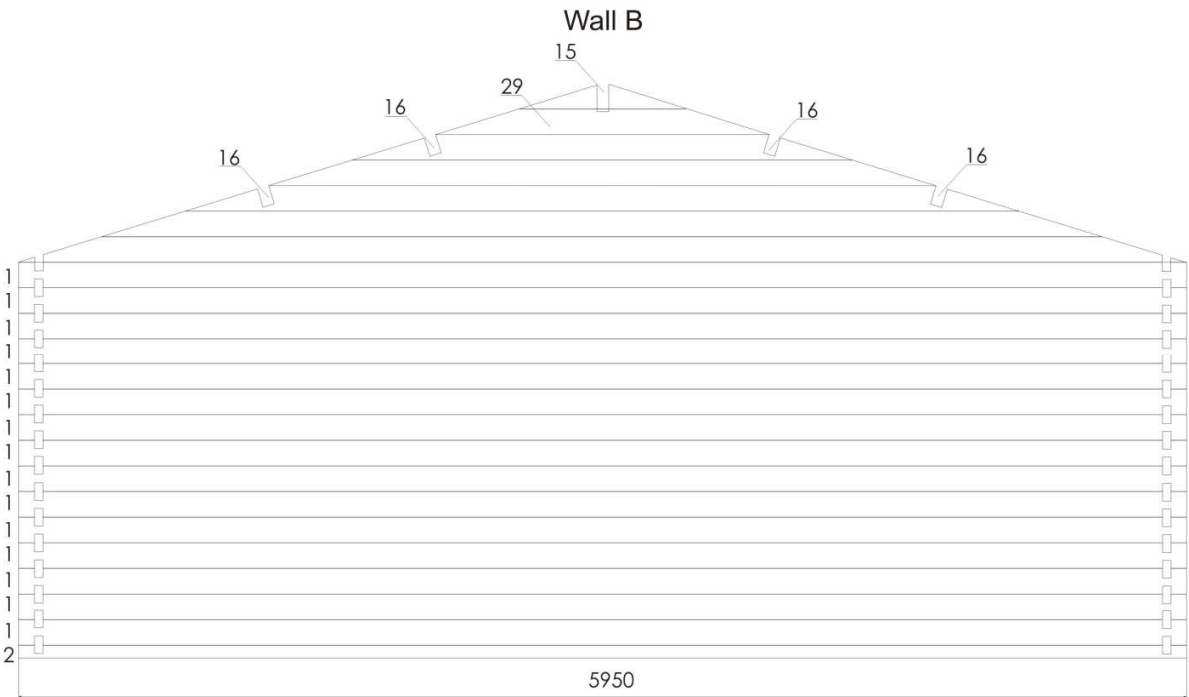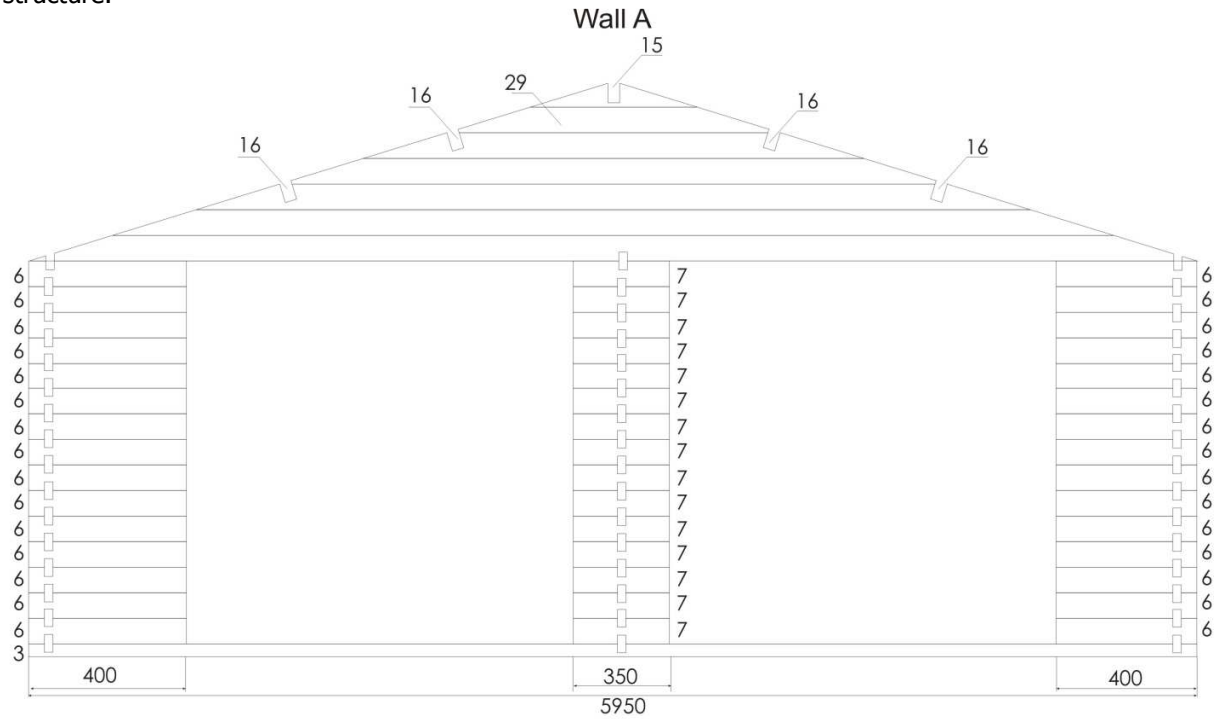




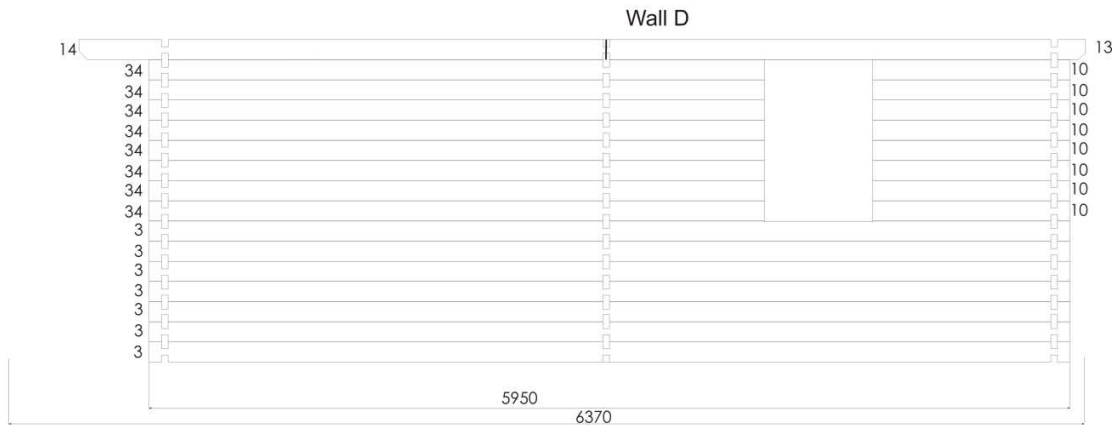

**4.5. Roof frame triangles:** After the walls are assembled, mount the roof frame triangles. These should be mounted as whole structures.

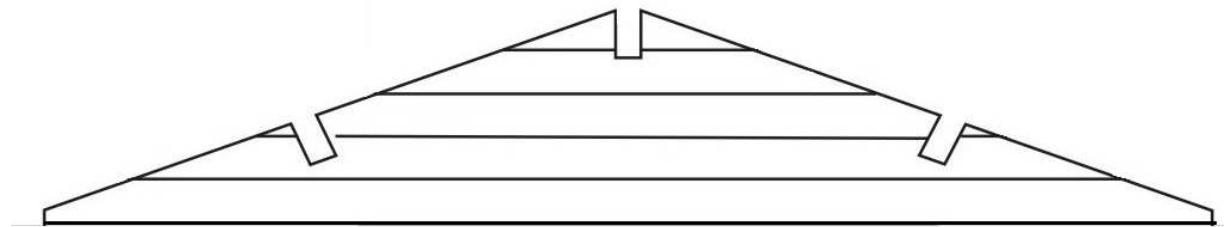


**4.6. Rafters:** The rafters must be mounted horizontally and inserted in the mounting-spaces found on the roof frame triangles. The rafters share a common mounting-space in the middle one of the three triangles. Here are two types of rafter-mounting shown below.

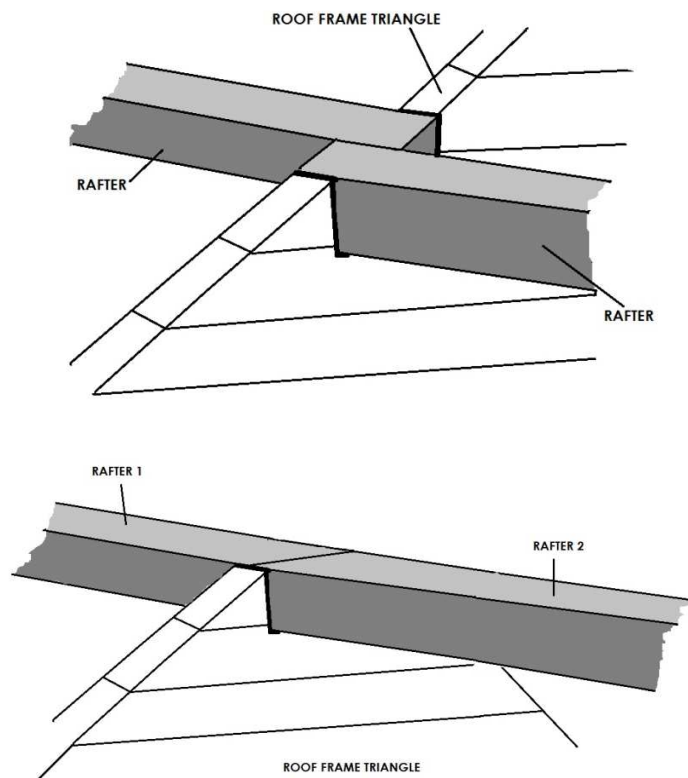





**4.7. Roof-boards:** The next step is to attach the roof-boards vertically and screw them into the rafters. Make sure the ends of the roof-boards are perfectly parallel to each other. Then fix the roof plank border under the roof-boards as show below. The roof-plank must be screwed to the roof plank border.

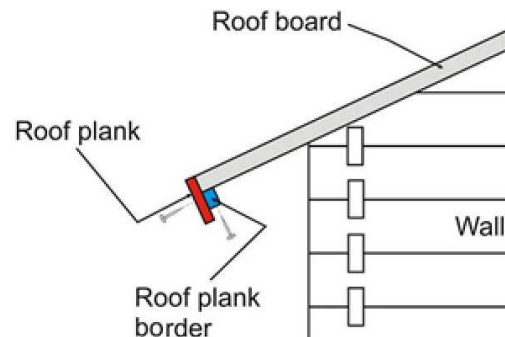


**4.8. Wind-boards:** Place the wind-boards on top of each other to make a 90 degree angle. Now attach these ones on a roof frame triangle and fix by screwing them in.

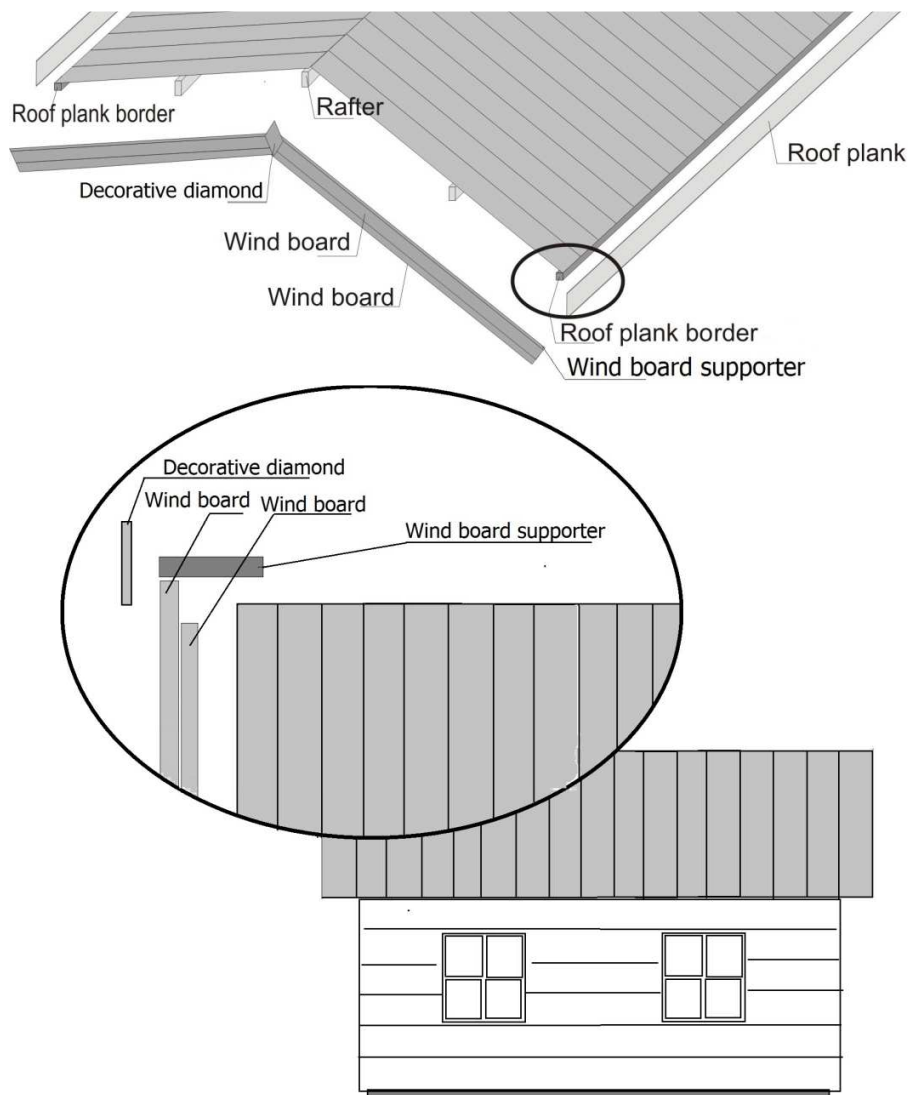

**4.9. Door:** Assemble the door frame fixing it with screws:

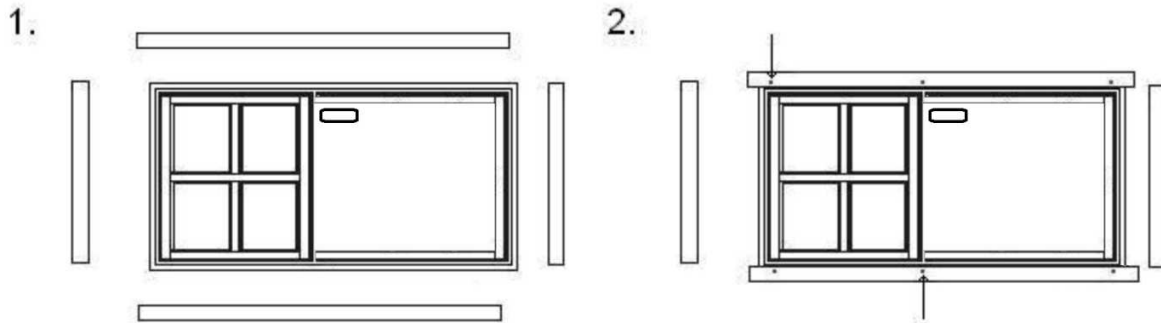


Screw the support trims in to the door frame and insert door frame in to its space from the outside of the structure. Then fix the rest of the support trims from inside the garage:

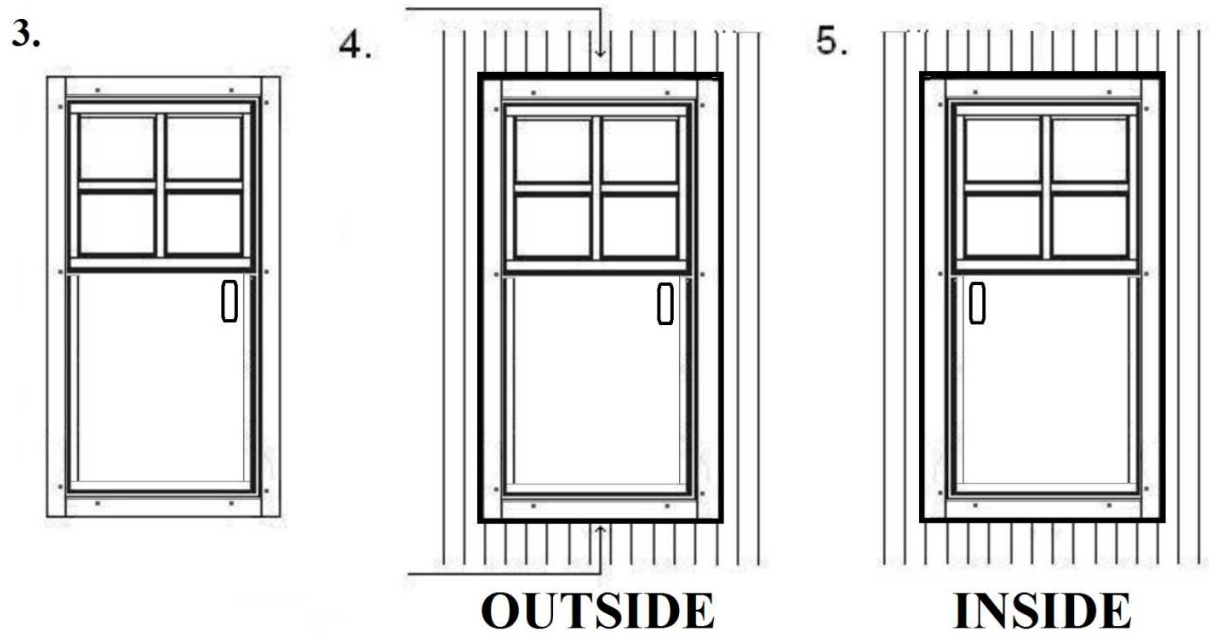


**Notice:**

- Keep in mind that the support trims must be screwed to the door frames, not to the wall-boards!
- Do not worry about the space between the wall and upper window frame. The wood will naturally contract so that the space should disappear within a month or so. Do not try to fill the space in yourself during the assembly process.

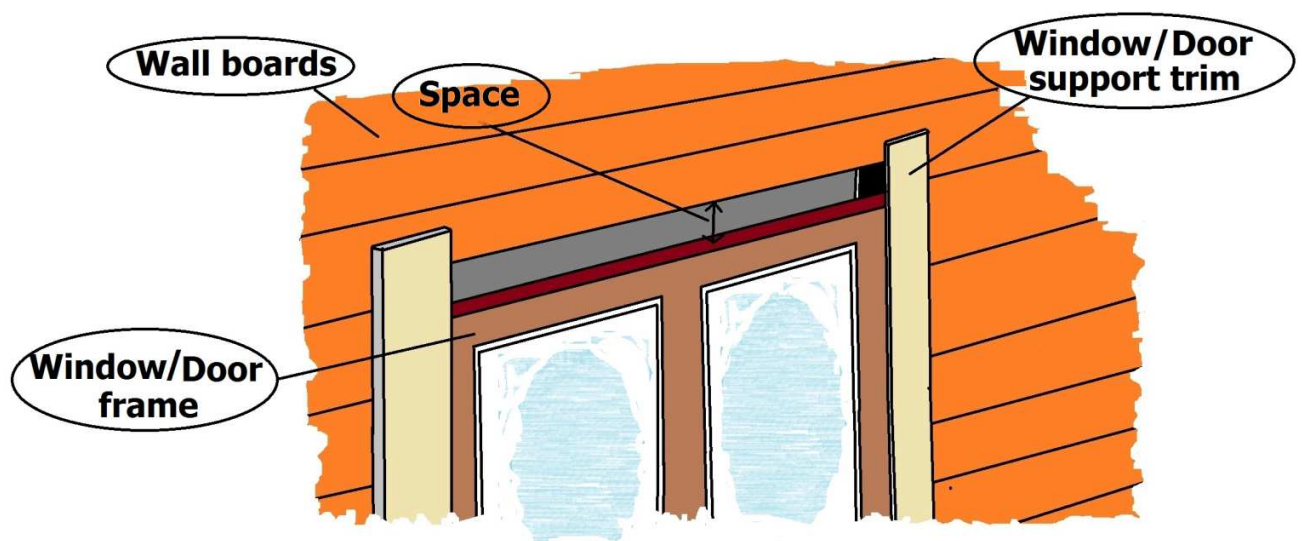


**4.10. Windows:** The windows must be installed in the same way as the doors:

1.

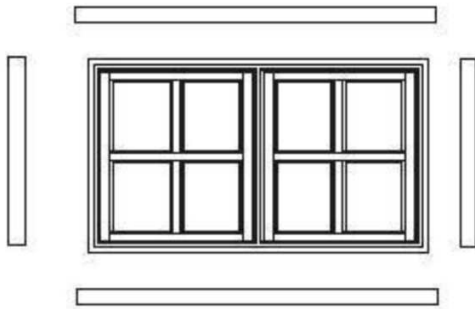


Place the window frame and four support trims on the stable surface.

2.

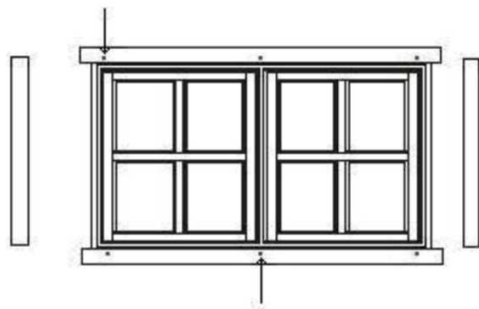


Drill the holes in the support trims and screw them in to the window frame.

3.

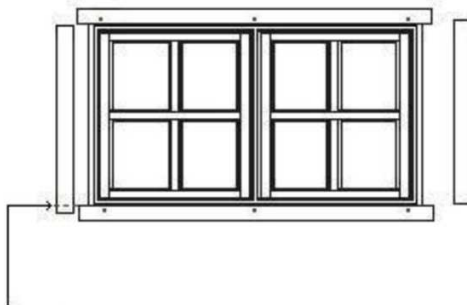


Cut the support trims if necessary

4.

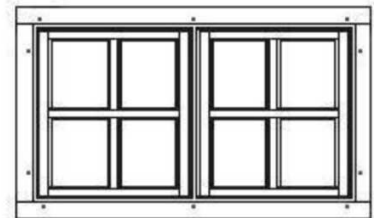


All four support trims are fixed

5.

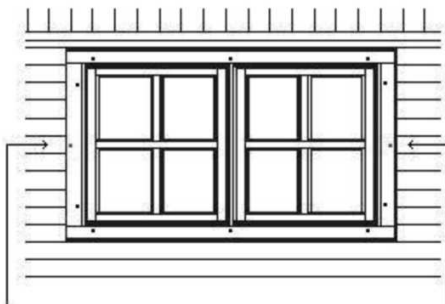


Just insert the window frame in to the space (no screwing)

6.

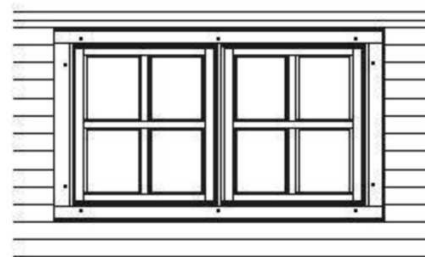

Now screw the rest four support trims in to the window frame from the other side.

**4.11. Garage doors:** For installing the garage doors (ONLY!) it is necessary to saw off a part of the first row wall-board and a bearer:

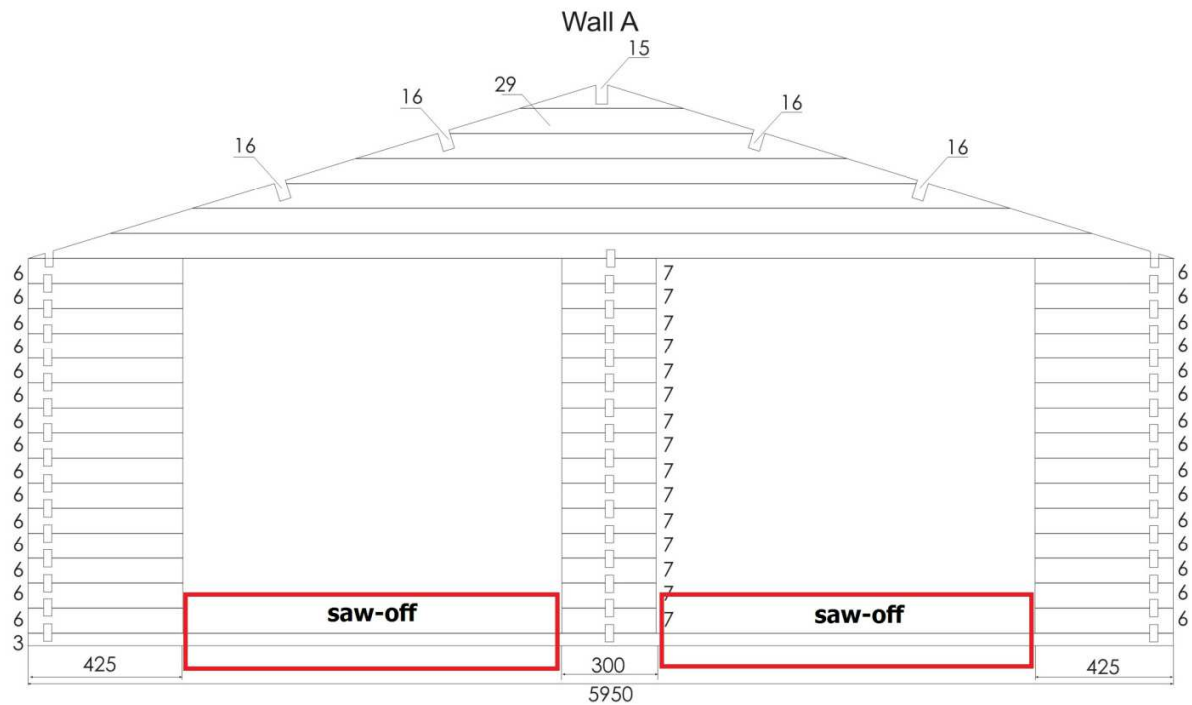

Assemble the garage door frame. Use screws:

1.




Screw the support trims into the garage door frame:

2.




3.

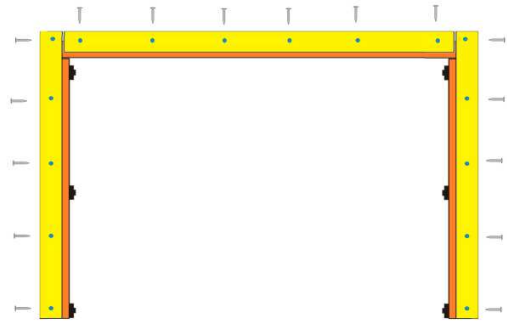


Then insert the door frame into place. The next step is to fix the rest of the support trims to the door frame from the other side. Notice: each frame support trim must fixed with at least 5 nails.

4.

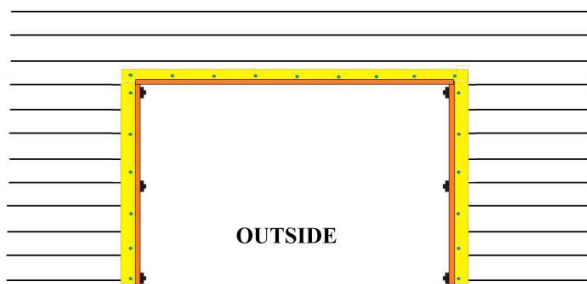

5.

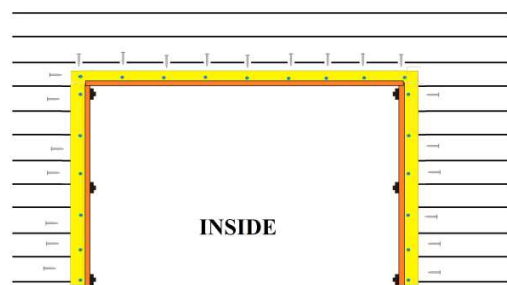


Notice:


- Keep in mind that the support trims must be screwed to the door frame, not the wall-boards.
- Do not worry about the space between the wall and upper door frame. The wood will naturally contract, so that the space should disappear within a month or so. Do not try to fill the space in yourself during the assembly process.

Finally the garage doors must be hung on the hinges found on the door frame.

6.

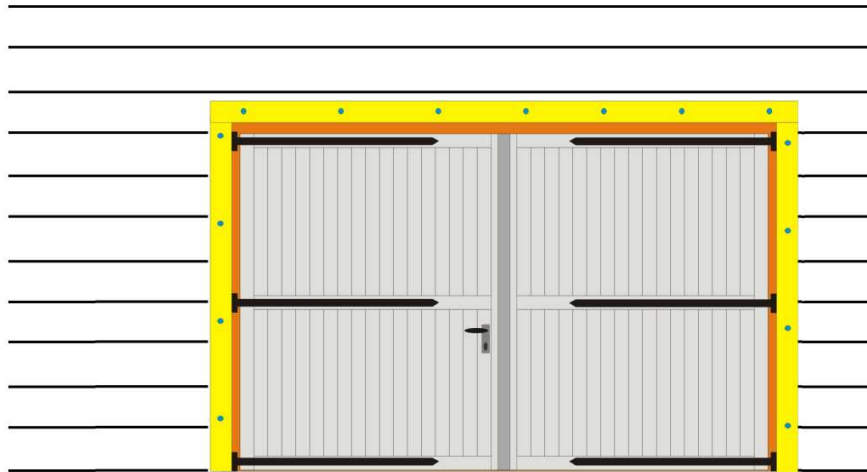

**4.12. Felt roof shingles:** When the whole structure is assembled and has been treated, attach the felt roof shingles to the roof-boards as shown in the picture. We recommend that you cover the roof only after the structure has been treated.

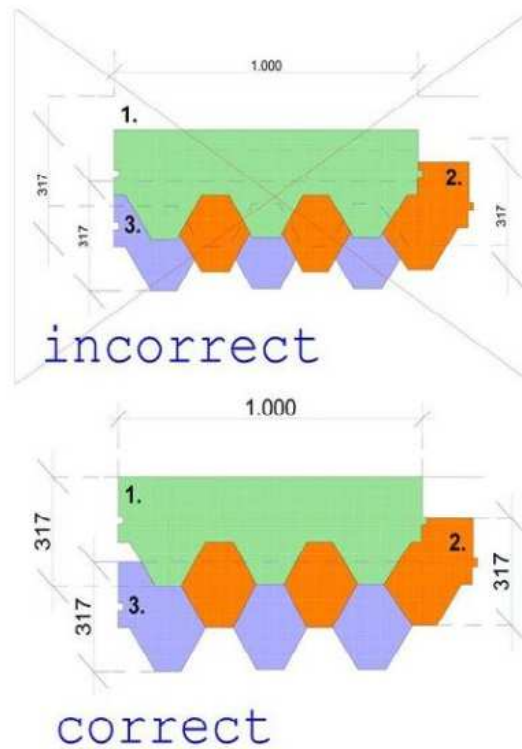

**Treatment.** It is important to treat the product using a quality wood-preservative instantly after the assembly process is finished. Apply at least 2 coats to the outside and 1 to the inside. Repeat annually.

**After-sale service.** Any missing parts or defects must be declared using the After Sales Service form (available in our web site [www.quick-garden.co.uk](http://www.quick-garden.co.uk) or in the last page of this instruction) within 10 days of the product being received. Our After Sales Service will replace defective or missing parts. Make sure you fill in the After-sales service form correctly. After-sale service line [+ 44 207 097 0013](tel:+442070970013) or [clients@quick-garden.co.uk](mailto:clients@quick-garden.co.uk)

See the terms and conditions of Quick-Garden at [www.quick-garden.co.uk/general-conditions](http://www.quick-garden.co.uk/general-conditions)

Assembly notice – keep for later reference.

We hope you enjoy your purchase.

*Sincerely yours*  
*Quick-Garden team*





Customer details: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Product model: \_\_\_\_\_

Please name or describe the missing or damaged parts.

Part number	Dimensions	Quantity	Reason for requesting a replacement part